



Photo-receiver Amplifier

General Description

The epc13x family products are monolithic, integrated high sensitive photo-diode amplifiers for light-barrier, light-curtain, and the like applications. It amplifies current pulses from reverse-biased PIN photodiodes (e.g. epc200, epc300) and generates an analog output signal, driven by a push-pull output stage. This device allows the design of short to long range light barriers from a few millimeters up to tens of meters.

The analog output can be analyzed by signal processing circuitry in order to extract weak optical signals on a heavy noise floor. Thus, very sensitive light barriers or other optical sensors can be built with very limited effort.

The epc13x is controlled by a digital controller, which uses no external clock signal. The device has been optimized to utilize the least count of external components.

epc134-epc139 are the same devices but with an digital output. Please refer to the corresponding data sheet.

Features

- Low current consumption
- High sensitivity
- Analog output
- CSP6 package with very small footprint.


Applications

- Light barriers ranging from millimeters to tens of meters
- Light curtains
- Smoke detectors
- Liquid detectors
- Heart beat monitors

Device selection table

| Model | Output | | Light Reserve Output | | Response Time | | Sensitivity | | | |
|---------------|----------|----------|----------------------|----------|---------------|----------|-------------|----------|----------|-----------|
| | digital | analog | w/o | with | slow | fast | low | medium | high | very high |
| epc130 | | x | x | | x | | | | x | |
| epc131 | | x | x | | | x | x | | | |
| epc134 | x | | | x | | x | | x | | |
| epc135 | x | | | x | x | | | | x | |
| epc136 | x | | | x | | x | x | | | |
| epc137 | x | | | x | x | | | | | x |
| epc138 | x | | x | | x | | | | x | |
| epc139 | x | | x | | | x | x | | | |

Functional Block Diagram

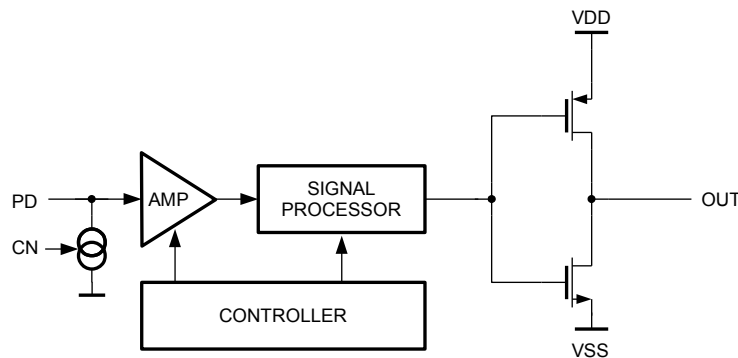

| Absolute Maximum Ratings (Notes 1, 2) | | Recommended Operating Conditions | | | |
|---|------------------------|-----------------------------------|-------------|--------------|---|
| Power Supply Voltage V_{DD} | -5.5V to +5.5V | Min. | Max. | Units | |
| Voltage to Any Pin | -0.3 to V_{DD} +0.3V | Power Supply Voltage (V_{DD}) | 4.0 | 5.2 | V |
| Maximum Power Dissipation | 300mW | Operating Temperature (T_A) | -40° | +85° | C |
| Storage Temperature Range (T_S) | -40°C to +85°C | Humidity (non-condensing) | +5 | +95 | % |
| Lead Temperature solder, 4 sec. (T_L) | +260°C | | | | |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Recommended operating conditions indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see Electrical Characteristics.



Note 2: This device is a highly sensitive CMOS ac current amplifier with an ESD rating of JEDEC HBM class 0 (<250V). Handling and assembly of this device should only be done at ESD protected workstations.

Electrical Characteristics

$V_{DD} = 5.0\text{ V}$, $-40^\circ\text{C} < T_A < +85^\circ\text{C}$, output load 20 kOhm/20 pF, except as specified

| Symbol | Parameter | | Conditions/Comments | Values | | | Units |
|------------|-----------------------------|--------|---|--------|---------------|--------------|---------------|
| | | | | Min. | Typ. | Max. | |
| V_{DD} | Power Supply Voltage | | Pin V_{DD} | 4.0 | 5.0 | 5.2 | V |
| I_{DD} | Power Supply Current | epc130 | R1=27k, no photo current | | 0.8 | 1.2 | mA |
| | | epc131 | R1=4k7, no photo current | | 1.1 | 1.5 | |
| V_{PK} | Sensitivity | epc130 | $I_{PD} = 80\text{ nA}$ | | 320 | | mV |
| | | epc131 | $I_{PD} = 800\text{ nA}$ | | 320 | | mV |
| V_{PD} | Reversed Photodiode Voltage | | relative to V_{DD} | | $V_{DD}-1.55$ | | V |
| V_{OF} | Output Offset Voltage | | | 1.4 | 1.55 | 1.7 | V |
| V_{OUT} | Output Voltage Limits | | | 0.3 | | $V_{DD}-1.0$ | V |
| F_{OUT} | Output Noise Voltage (RMS) | epc130 | $I_{PD} = 100\text{ }\mu\text{A}$ | | 35 | 40 | mV |
| | | | $I_{PD} = 3.0\text{ mA}$ | | 80 | 100 | |
| | | epc131 | $I_{PD} = 100\text{ }\mu\text{A}$ | | 40 | 50 | |
| | | | $I_{PD} = 3.0\text{ mA}$ | | 90 | 100 | |
| I_{PDDC} | DC Light Current Range | | Refer to section Application Information, Ambient Light | 0.0 | | 3.0 | mA |
| C_{PD} | Photodiode Capacitance | epc130 | Refer to section Application Information, Photodiode Capacitance | 15 | | 50 | pF |
| | | epc131 | | 30 | | 40 | |
| I_{OUT} | Output Current | | Push-pull driving capability | -100 | | +100 | μA |
| V_{POR} | Power-up Threshold Voltage | | The voltage at V_{DD} when the device starts up and the startup time is running. | 3.0 | 3.5 | 4.0 | V |
| V_{IPOR} | Hysteresis | | On power-up threshold voltage | 0.5 | 0.75 | 1.0 | V |
| t_{INIT} | Power-up Startup Time | | V_{DD} slew rate $>100\text{V/ms}$ | | | 1.0 | ms |
| t_{REC} | Recovery Time | epc130 | After the reception of a valid pulse current at pin PD until the output is stable at its operation voltage. Refer also to Other Parameters section. | | 400 | | μs |
| | | epc131 | | | 50 | | |
| t_{PD} | Input Pulse Width at Pin PD | epc130 | Current pulse width at pin PD necessary to generate an output signal at pin OUT. The input sensitivity is dependent on the input current pulse width (refer to the section Applications). | | 6 | | μs |
| | | epc131 | | | 0.75 | | μs |
| t_{rf} | Input pulse slew rate | epc130 | Recommended rise and fall time of the current pulse at pin PD | | 500 | | ns |
| | | epc131 | | | 50 | | ns |
| R_{PD} | Photodiode bias resistor | epc130 | refer to section 'Application Information, Photodiode Resistor' | | 27 | | k Ω |
| | | epc131 | | | 4.7 | | |

Connection Diagrams

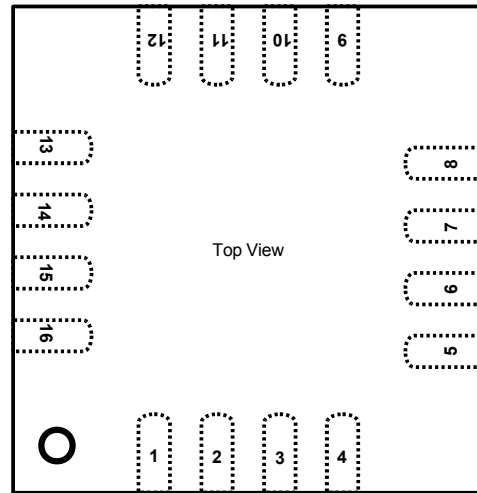

6-Pin Chip Scale Package (CSP)

16-Pin QFN Package

Note: For sampling only. Limited quantities. Please inquire.

| 6-Pin CSP | 16 Pin QFN | Pin Name | Description |
|-----------|------------|----------|---|
| 1 | 16 | OUT | Push-pull output pin. |
| 2 | 3 | VN | Negative power supply pin through a reverse-polarity protection diode. |
| 3 | 13 | VDD | Positive power supply pin. |
| 4 | 8 | CN | External capacitor for background light current regulator. |
| 5 | 11 | PD | Anode of photo diode. This is the analog input of the amplifier/filter circuitry. |
| 6 | 5 | VSS | Negative power supply pin. |
| n/a | 1 | NC | Not connected. |
| n/a | 2 | NC | Not connected. |
| n/a | 4 | NC | Not connected. |
| n/a | 6 | NC | Not connected. |
| n/a | 7 | NC | Not connected. |
| n/a | 9 | NC | Not connected. |
| n/a | 10 | NC | Not connected. |
| n/a | 12 | NC | Not connected. |
| n/a | 14 | NC | Not connected. |
| n/a | 15 | NC | Not connected. |

Other Parameters

(typical values, $T_{amb} = 25^{\circ}C$, $V_{DD} = 5.0V$, $I_{PD}=0mA$)

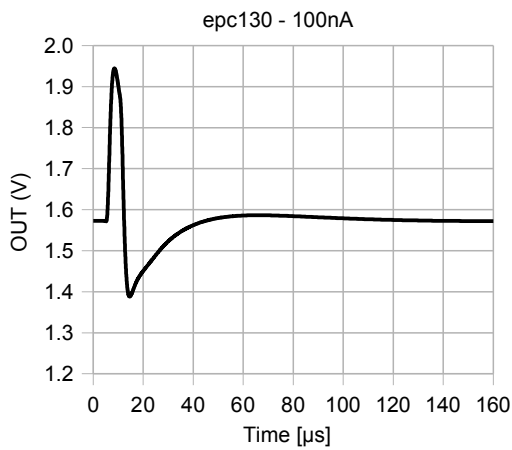
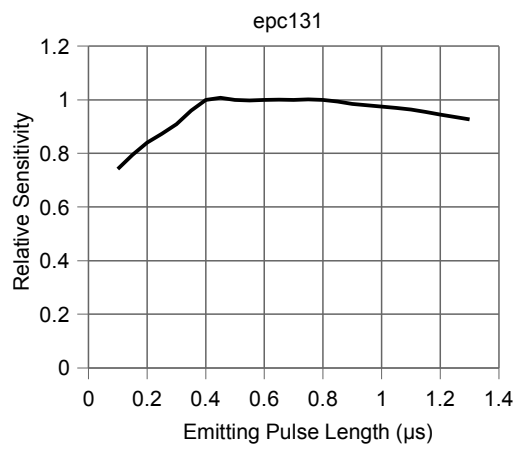
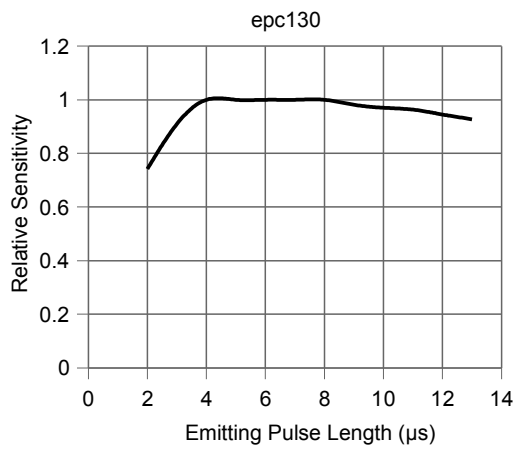


Photo diode current pulse 100nA

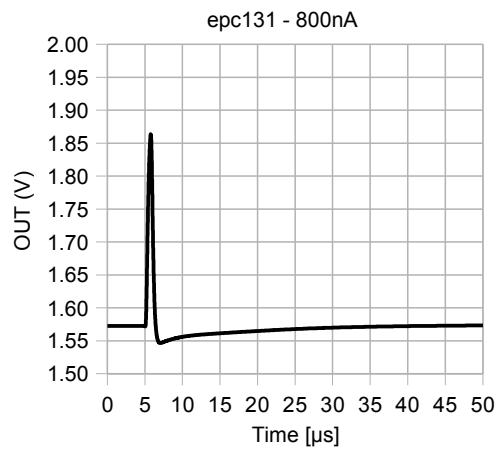


Photo diode current pulse 800nA

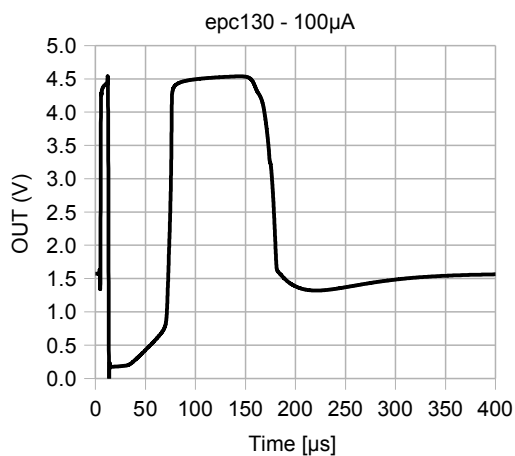


Photo diode current pulse 100 μA


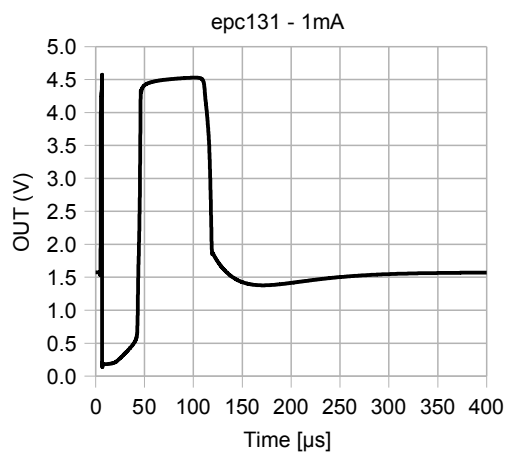


Photo diode current pulse 1mA

Functional Description

Power-up Sequence


If V_{DD} reaches V_{POR} , the startup sequence is initiated. After a time t_{DEL} , the photo diode bias circuit is enabled. Thus, a current generated by light on the photo diode flows into the pin PD. After the time t_{INIT} , the device is ready to receive AC light pulses.

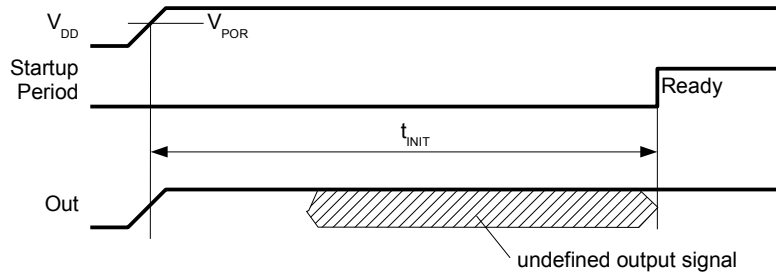

Power-up sequence

Power-down Sequence

When V_{DD} goes down, the device is turned off when V_{DD} is below V_{POR} minus V_{IPOR} .

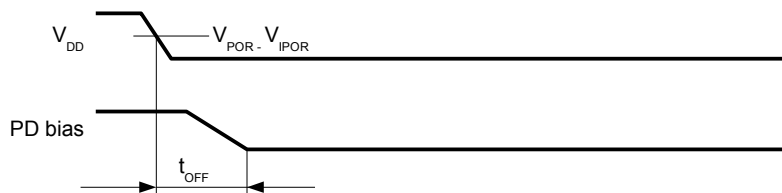


Power-down sequence

Light Pulse Reception

A light pulse on the photo diode generates a current pulse into the pin PD of the device. This current pulse is transformed to a voltage pulse and amplified. The signal form is dependent on the input pulse width, its slew rate and its strength. The value of the undershoot is also heavily dependent on the input signal. If the input signal is too strong, the output signal becomes saturated close to V_{DD} , or V_{SS} respectively.

After a waiting time given by t_{REC} , the next light pulse can be sent. If the waiting time is too short, the output signal of the next pulse is biased.

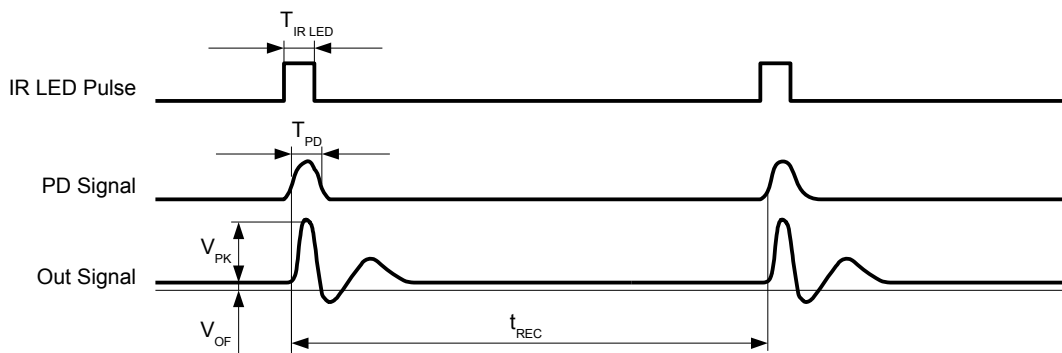


Light pulse reception

Application Information

Light Barrier Application

The following circuit is recommended to operate the epc130/131 as a photo diode amplifier in a single beam light barrier:

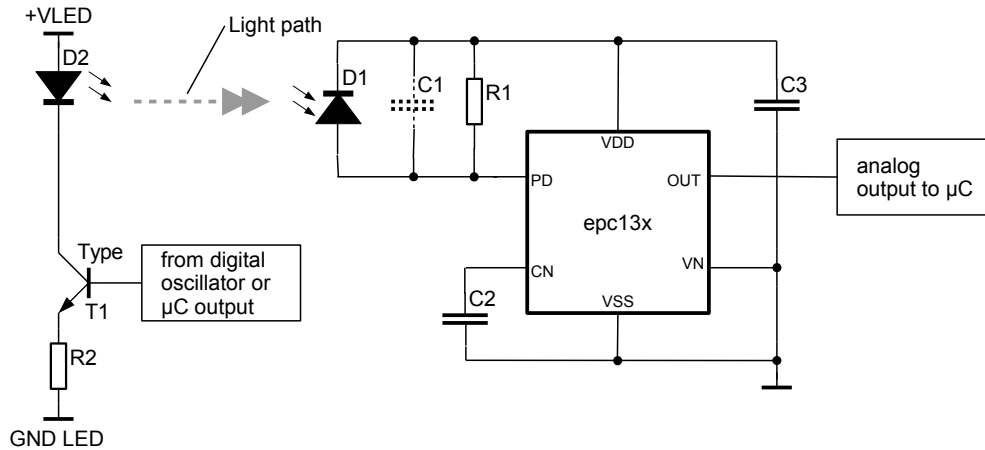

Recommended Components Values

R1: 27k for epc130 and 4.7k for epc131 (bias resistor). Sensitivity can be reduced by the reduction of this resistor.

R2: dependent on the required LED current

C1: Usually not needed. May be up to 100 pF (refer to section 'Photodiode Capacitance').

C2: 33nF (DC input current filter capacitor)

C3: 100nF or more (power supply filter capacitor)

D1: PIN photo diode, epc200 or epc3xx-family or similar devices

D2: IR LED, TSML1000 (Vishay) or similar devices


Working Principle

The IR LED D2 emits light pulses which are sent towards the photo diode D1. If there is no obstacle between the two devices, the light pulse generates an AC current (I_{PD}) in the reverse biased photo diode D1 into the pin PD. I_{PD} is proportional to the power of the light pulse. The current pulse is transformed to a voltage and amplified. Once a light pulse is generated by the IR LED, a next light pulse must not be generated until the recovery time t_{REC} (max.).

Design Precautions

The sensitivity at pin PD is very high in order to achieve a long operation range of light barriers even without lenses in front of the IR LED and/or the photo diode. Thus, the pin PD is very sensitive to EMI. Special care should be taken to keep the PCB track at pin PD as short as possible (a few mm only!). This track should be kept away from the IR LED signal tracks and from other sources which may induce unwanted signals. It is strongly recommended to cover the chip, the photodiode and all passive components around the chip with a metal shield. A recommended part is shown in the following figure:

The pins at the bottom are to solder the shield to the PCB with electrical connection to VDD. The hole in the front is the opening window for the photo diode. The back side of the PCB below the sensitive area (D1, C1, R1, epc13x) shall be a polygon connected to VDD to shield the circuit from the back side. C1 must be of high mechanical stability (no piezoelectric effect) in order to avoid unwanted signals by mechanical shock or vibration.




recommended EMC shield

Ambient Light

Photodiode DC current can be generated by ambient light, e.g. sun light. DC currents at pin PD do not generate a DC output signal. Thus, the offset voltage V_{OF} remains constant. However, if I_{PDDC} is above the stated value, the input is saturated which blocks the detection of AC current pulses.


Photodiode Capacitance

If the photodiode capacitance is below the specified value, the system becomes more sensitive to the power supply ripple at higher frequencies (>200kHz). This sensitivity can be reduced by a parallel capacitor to the photodiode. However, this measure reduces the detection sensitivity. If the photo diode capacity is above the specified value, a lower detection sensitivity and a possible higher sensitivity spread results.


Layout Information (all measures in mm, )

CSP-6 Package

Mechanical Dimensions

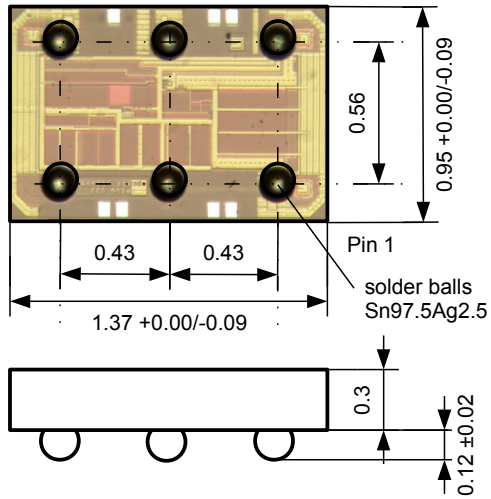


Layout Recommendations

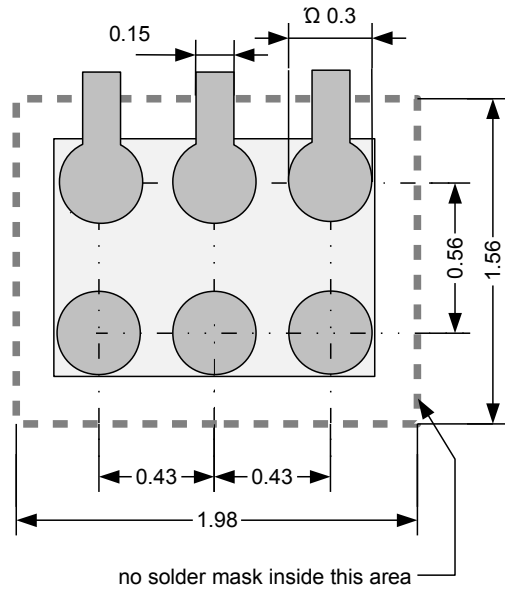

QFN16 Package

Note: For sampling only. Limited quantities. Please inquire.

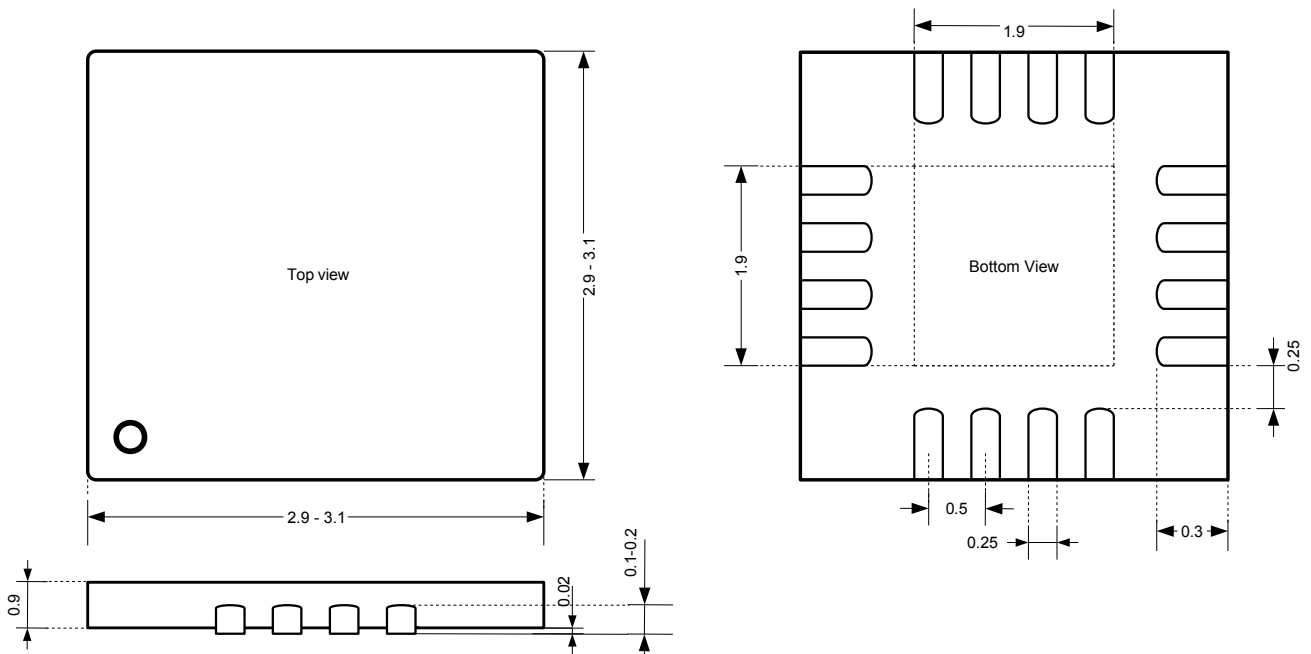


Reflow Solder Profile

For infrared or conventional soldering the solder profile has to follow the recommendations of IPC/JEDEC J-STD-020C (min. revision C) for Pb-free assembly for both types of packages. The peak soldering temperature (T_L) should not exceed +260°C for a maximum of 4 sec.

Packaging Information (all measures in mm)

Tape & Reel Information

The devices are mounted on embossed tape for automatic placement systems. The tape is wound on 178 mm (7 inch) or 330 mm (13 inch) reels and individually packaged for shipment. General tape-and-reel specification data are available in a separate data sheet and indicate the tape sizes for various package types. Further tape-and-reel specifications can be found in the Electronic Industries Association (EIA) standard 481-1, 481-2, 481-3.

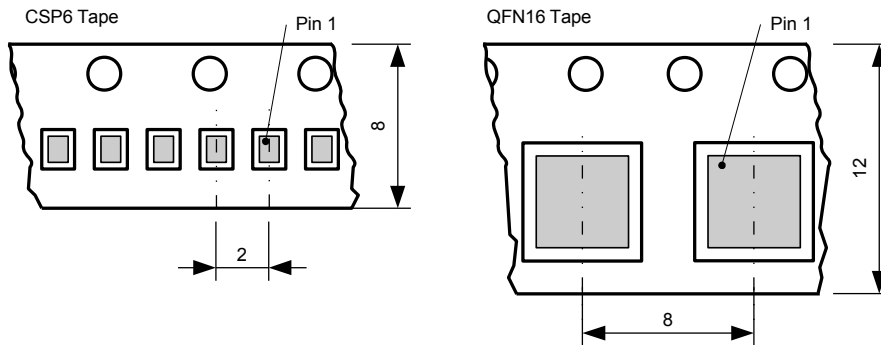

epc does not guarantee that there are no empty cavities.
Thus, the pick-and-place machine should do check the presence of a chip during picking.

Order Information

Standard products:

| Part Number | Package | RoHS compliance | Packaging Method |
|-------------|---------|-----------------|------------------|
| epc130-CSP6 | CSP6 | Yes | Reel |
| epc131-CSP6 | CSP6 | Yes | Reel |

Note: For sampling only. Limited quantities. Please inquire.

| Part Number | Package | RoHS compliance | Packaging Method |
|--------------|---------|-----------------|------------------|
| epc130-QFN16 | QFN16 | Yes | Reel |
| epc131-QFN16 | QFN16 | Yes | Reel |

IMPORTANT NOTICE

ESPROS Photonics AG and its subsidiaries (epc) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to epc's terms and conditions of sale supplied at the time of order acknowledgment.

epc warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with epc's standard warranty. Testing and other quality control techniques are used to the extent epc deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

epc assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using epc components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

epc does not warrant or represent that any license, either express or implied, is granted under any epc patent right, copyright, mask work right, or other epc intellectual property right relating to any combination, machine, or process in which epc products or services are used. Information published by epc regarding third-party products or services does not constitute a license from epc to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from epc under the patents or other intellectual property of epc.

Resale of epc products or services with statements different from or beyond the parameters stated by epc for that product or service voids all express and any implied warranties for the associated epc product or service. epc is not responsible or liable for any such statements.

epc products are not authorized for use in safety-critical applications (such as life support) where a failure of the epc product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of epc products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by epc. Further, Buyers must fully indemnify epc and its representatives against any damages arising out of the use of epc products in such safety-critical applications.

epc products are neither designed nor intended for use in military/aerospace applications or environments unless the epc products are specifically designated by epc as military-grade or "enhanced plastic." Only products designated by epc as military-grade meet military specifications. Buyers acknowledge and agree that any such use of epc products which epc has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

epc products are neither designed nor intended for use in automotive applications or environments unless the specific epc products are designated by epc as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, epc will not be responsible for any failure to meet such requirements.