

# Line imager epc901


espros photonics corporation

Very high sensivity due to 100% fill factor	Correlated-double sampling (CDS) per pixel
Ultra high-speed image acquisition	Single-ended or differential analog video output
4 analog frame stores on chip	2 temperature sensors on chip
Single or multi-frame acquisition	Slim-line CSP32 housing, 8.0 x 1.3 x 0.3 mm

## **FUNCTIONAL DESCRIPTION**

The epc901 is a small footprint and very thin line imager. It is designed to fulfill the need of very low optical cross-talk in encoder sensors because the encoder code wheel or ruler can be placed as close to 50µm above the optical sensitive part of the imager. This is possible due to it backside illuminated imaging technology (BSI). Standard frontside imager need a distance of 10 times more and thus have to deal with a high cross-talk (refer to the backside of this leaflet).

Although, it is a high-performance CCD line sensor capable of storing a total of 4 frames in the frame store elements for ultra high-speed image acquisition of up to 500k lines per second. In the continuous mode, even 50k lines per second are possible.

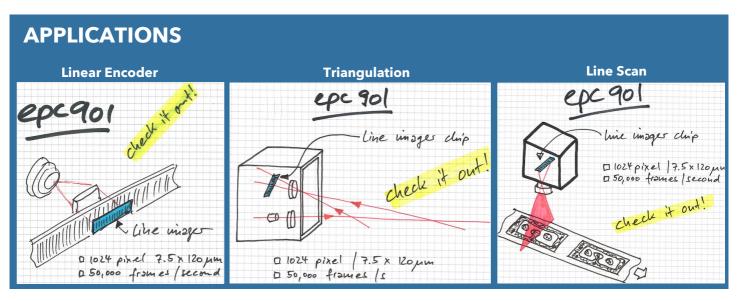

### **SPECIFICATIONS**





**Pixel-field** 1024 x 1 pixel, CCD backside illuminated



**Pixel-pitch** 7.5 x 120µm



**Photosensitive area** 7.68 x 0.12 mm



**Optical fill factor** 100%



**Spectral range** 350 ... 1'120 nm



dB

**Frame rate** up to 50 kfps continuous up to 500 kfps burst

Quantum efficiency

> 90% @ 630nm

**Full-well capacity** 

**Conversion gain** 

400 ke-

5 µV/e-

**SNR** 

up to 72 dB



Data Interface

Single-ended or differential analog video output



**Control Interface** 5 pin HW interface or I2C

7	
7	


**Nom. Operation voltage** 3.3 V




**Power Consumption** typ. 165 mW power save mode 4.5 mW

## Slim-line design advantages epc901

#### High optical cross-talk

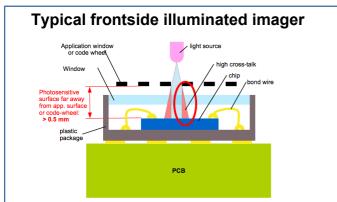

#### Low optical cross-talk

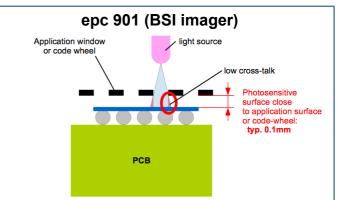

© 2019 ESPROS Photonics Corporation Characteristics subject to change without notice

